


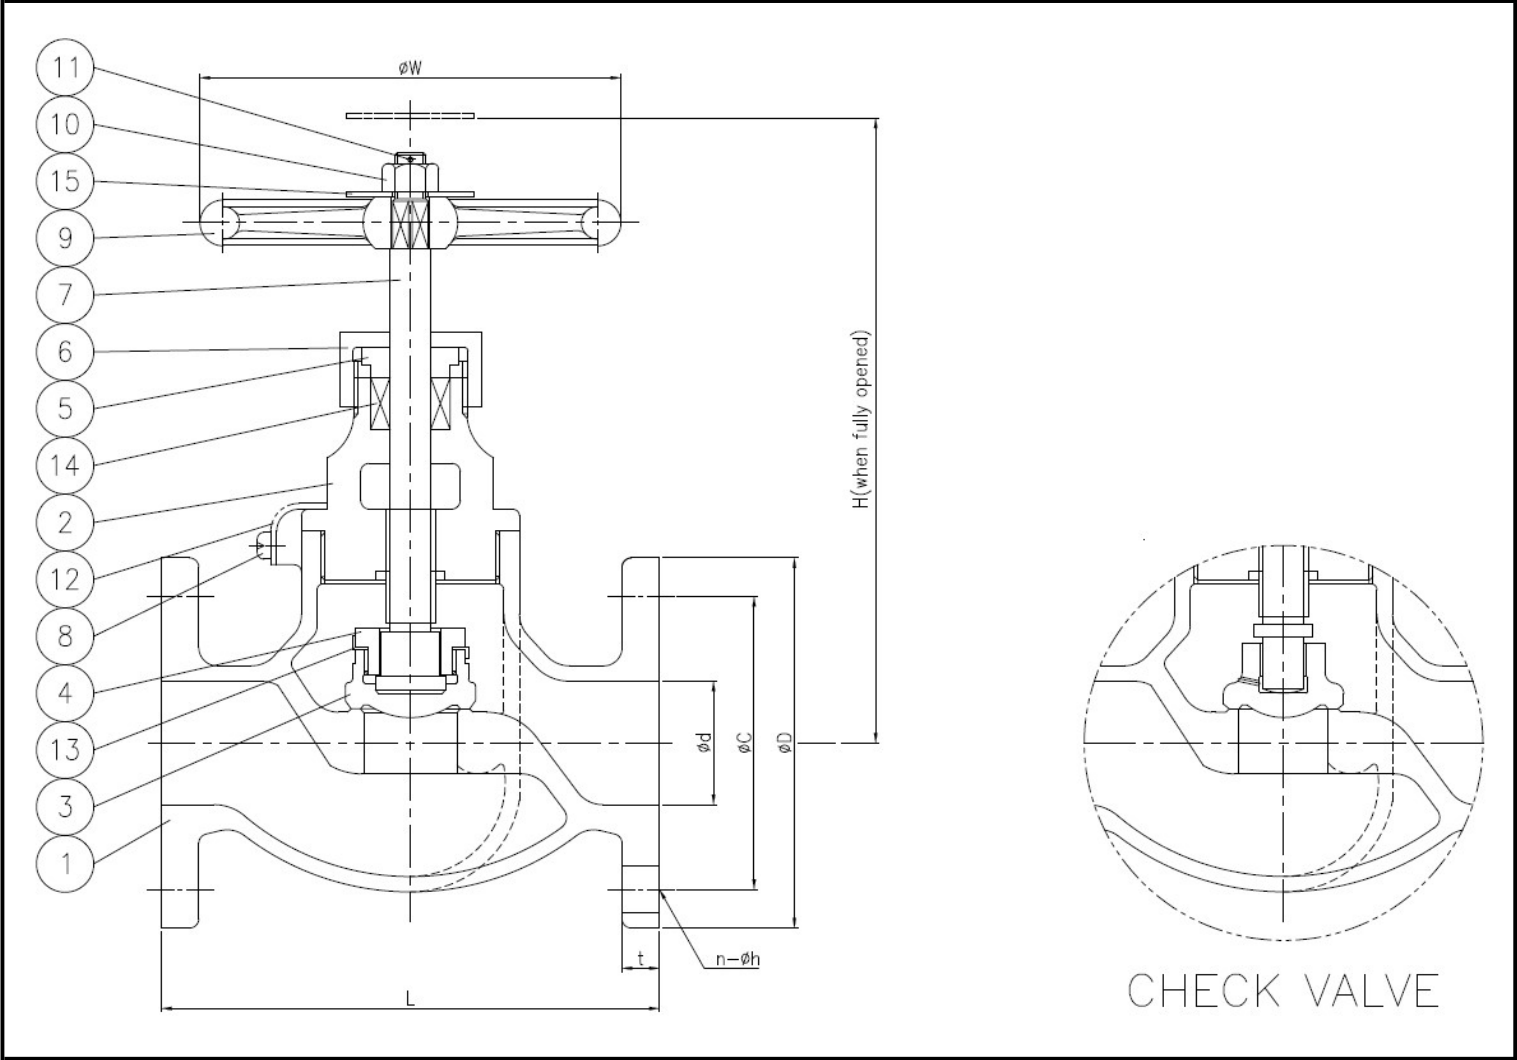

■ Dimensions - [mm]

Rating	SIZE	Ød	L	H	FF Flange				ØW	Weight (kg)
					ØD	ØC	t	n-Øh		
5K	15A	15	100	130	80	60	9	4-12	80	2.02/1.96
	20A	20	110	140	85	65	10	4-12	100	2.86/2.77
	25A	25	120	160	95	75	10	4-12	125	3.54/3.41
	32A	32	140	170	115	90	12	4-15	125	5.0/4.86
	40A	40	160	190	120	95	12	4-15	140	5.48/6.30
	50A	50	210	235	130	105	14	4-15	140	11.7
	65A	65	250	260	155	130	14	4-15	160	17.0
16K	15A	15	110	130	95	70	12	4-15	80	2.76/2.70
	20A	20	120	140	100	75	14	4-15	100	3.72/3.63
	25A	25	130	160	125	90	14	4-19	125	5.20/5.09
	32A	32	160	170	135	100	16	4-19	125	5.91/6.77
	40A	40	180	190	140	105	16	4-19	140	8.43/8.25