



CAC[BC]5K/16K GLOBE VALVES - JIS F 7301/7303

GLOBE CHECK VALVES - JIS F 7351/7409

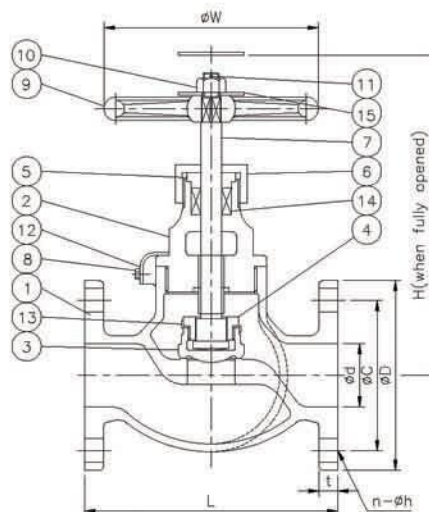

CHECK VALVE

Dimensions

unit : mm

Material List

Rating	SIZE	ϕd	L	H	FF Flange				ϕW	Weight (kg)
					ϕD	ϕC	t	n- ϕh		
5K F7301 F7351	15A	15	100	130	80	60	9	4-12	80	2.02/1.96
	20A	20	110	140	85	65	10	4-12	100	2.86/2.77
	25A	25	120	160	95	75	10	4-12	125	3.54/3.41
	32A	32	140	170	115	90	12	4-15	125	5.0/4.86
	40A	40	160	190	120	95	12	4-15	140	6.48/6.30
	50A	50	210	235	130	105	14	4-15	140	11.7
16K F7303 F7409	65A	65	250	260	155	130	14	4-15	160	17.0
	15A	15	110	130	95	70	12	4-15	80	2.76/2.70
	20A	20	120	140	100	75	14	4-15	100	3.72/3.63
	25A	25	130	160	125	90	14	4-19	125	5.20/5.09
	32A	32	160	170	135	100	16	4-19	125	6.91/6.77
	40A	40	180	190	140	105	16	4-19	140	8.43/8.25

NO.	Parts	Material
1	Body	CAC406(BC6)
2	Bonnet	C3771
3	Disc	C3771
4	Disc nut	C3604
5	Packing gland	C3604
6	Packing gland nut	C3604
7	Stem	C3771
8	Set screw	SUS304
9	Handwheel	FC200
10	Hex. nut	C3604
11	Split pin	C2600
12	Lockplate	C2600
13	Disc lock washer	C2600
14	Packing	GRAPHITE
15	Name plate	C2801orSUS304

Hydro. test pressure

unit : kgf/cm²

Rating	5	16
Shell	10.5	33
Seat	7.7	24.2

Max. working pressure

unit : kgf/cm²

Rating Fluid condition	5	16
Steam up to 205°C	5	16
Air, gas, oil and pulsation water		
Non shock water	7	22