
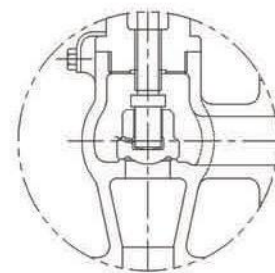


CAC[BC]5K/16K ANGLE VALVES - JIS F 7302/7304
ANGLE CHECK VALVES - JIS F 7352/7410

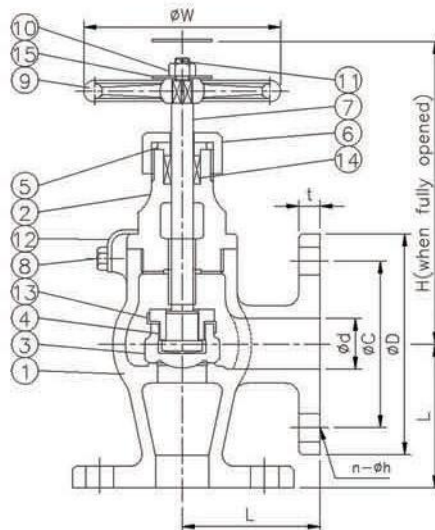

CHECK VALVE

Dimensions

unit : mm

Material List

Rating	SIZE	ϕd	L	H	FF Flange				ϕW	Weight (kg)
					ϕD	ϕC	t	n- ϕh		
5K F7302 F7352	15A	15	55	120	80	60	9	4-12	80	1.98/1.92
	20A	20	60	130	85	65	10	4-12	100	2.73/2.64
	25A	25	65	145	95	75	10	4-12	125	3.44/3.30
	32A	32	80	150	115	90	12	4-15	125	4.77/4.63
	40A	40	85	165	120	95	12	4-15	140	5.99/5.81
16K F7304 F7410	50A	50	100	200	130	105	14	4-15	140	10.10
	65A	65	115	220	155	130	14	4-15	160	15.80
	15A	15	70	120	95	70	12	4-15	80	2.73/2.67
	20A	20	75	130	100	75	14	4-15	100	3.65/3.56
	25A	25	85	145	125	90	14	4-19	125	5.16/5.02
	32A	32	95	150	135	100	16	4-19	125	6.72/6.58
	40A	40	100	165	140	105	16	4-19	140	8.13/7.98

NO.	Parts	Material
1	Body	CAC406(BC6)
2	Bonnet	C3771
3	Disc	C3771
4	Disc nut	C3604
5	Packing gland	C3604
6	Packing gland nut	C3604
7	Stem	C3771
8	Set screw	SUS304
9	Handwheel	FC200
10	Hex. nut	C3604
11	Split pin	C2600
12	Lockplate	C2600
13	Disc lock washer	C2600
14	Packing	GRAPHITE
15	Name plate	C2801orSUS304

Hydro. test pressure

unit : kgf/cm²

Rating	5	16
Shell	10.5	33
Seat	7.7	24.2

Max. working pressure

unit : kgf/cm²

Rating	5	16
Fluid condition		
Steam up to 205℃		
Air, gas, oil and pulsation water	5	16
Non shock water	7	22