
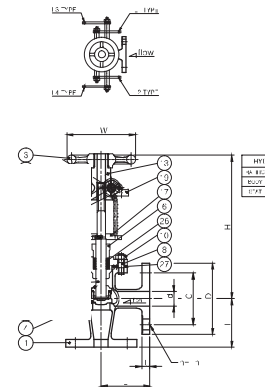
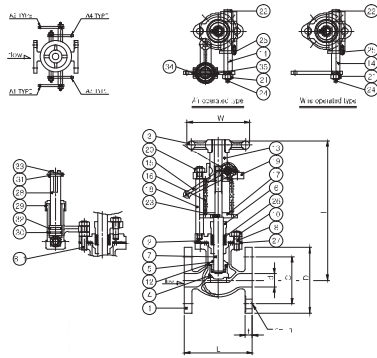


CAC[BC] EMERGENCY SHUT-OFF VALVES - JIS F 7399

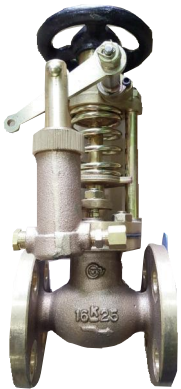

Dimensions

Rating	Size	Od	A-Type		L-Type		FF Flange				ØW
			L	H	L	H	ØD	ØC	t	n-Øh	
5K	15A	15	110	265	70	255	80	60	9	4-12	Ø120
	20A	20	120	270	75	255	85	65	10	4-12	Ø120
	25A	25	130	270	85	255	95	75	10	4-12	Ø120
	32A	32	160	300	95	280	115	90	12	4-15	Ø140
	40A	40	170	300	100	280	120	95	12	4-15	Ø140
16K	15A	15	110	265	70	255	95	70	12	4-15	Ø120
	20A	20	130	270	75	255	100	75	14	4-15	Ø120
	25A	25	130	270	85	255	125	90	14	4-19	Ø120
	32A	32	160	300	95	280	135	100	16	4-19	Ø140
	40A	40	170	300	100	280	140	105	16	4-19	Ø1409

Material List

NO	Parts	Material
1	BODY	CAC406
2	BONNET	CAC406
3	HANDWHEEL	SC480
4	DISC	CAC406
5	DISC NUT	C3771
6	PACKING GLAND	CAC406
7	STEM	SUS410
8	STUD BOLT	SS400
8-1	TENSION STUD BOLT	SS400
9	STUD BOLT	SS400
10	HEX,NUT	SS400
11	HEX,NUT	SS400
12	DISC LOCK WASHER	C2600
13	LIFTING PIECE	C3771
14	OPERATING SHAFT	SUS410
15	LEVER	SS400
16	SPRING	SWP-A
17	SPRING SUPPORT	SS400
18	STANCHION	SS400
19	STEM SUPPORT	CAC406
20	HEX,NUT	SS400
21	HEX,NUT	SS400
22	SNAP RING	SUP9
23	LOCK PIN	SS400
24	SPLIT PIN	C2600
25	SET SCREW	SS400
26	PACKING	PTFE
27	GASKET	NON ASBESTOS
28	PISTON	C3604
29	CYLINDER COVER	C3604
30	CYLINDER	CAC406
31	PIN	SS400
32	O-RING	NBR
33	SPLIT PIN	C2600
34	PLUG	C3604
35	MALE CONNECTOR	C3604

Hydro. test pressure

unit : kgf/cm²

Rating	5	16
Shell	7.0	7.0
Seat	2.0	2.0