
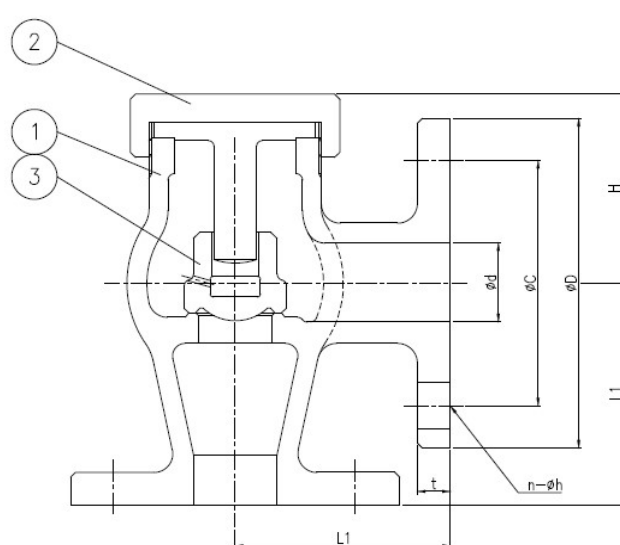


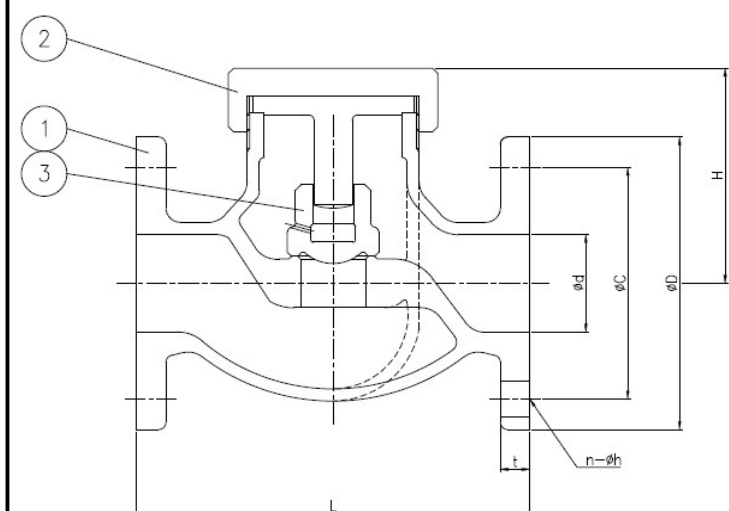

■ Dimensions - [mm]

Standard	Rating	SIZE	Ød	L	L1	H	FF Flange				Weight (kg)
							ØD	ØC	t	n-Øh	
JIS F7415 JIS F7417	5K	15A	15	100	55	66/56	80	60	9	4-12	1.62/1.57
		20A	20	110	60	71/59	85	65	10	4-12	2.17/2.07
		25A	25	120	65	81/67	95	75	10	4-12	2.80/2.65
		32A	32	140	80	83/65	115	90	12	4-15	3.92/3.68
		40A	40	160	85	91/69	120	95	12	4-15	5.49/4.95
JIS F7416 JIS F7418	16K	15A	15	110	70	66/56	95	70	12	4-15	2.37/2.36
		20A	20	120	75	71/59	100	75	14	4-15	3.05/3.01
		25A	25	130	85	81/67	125	90	14	4-19	4.42/4.36
		32A	32	160	95	83/65	135	100	16	4-19	5.87/5.67
		40A	40	180	100	91/69	140	105	18	4-19	7.67/7.12