


CAC[BC] 5K/16K LIFT CHECK[Union Bonnet Type] GLOBE VALVES - JIS F 7415/7417
 5K/16K LIFT CHECK[Union Bonnet Type] ANGLE VALVES - JIS F 7416/7418

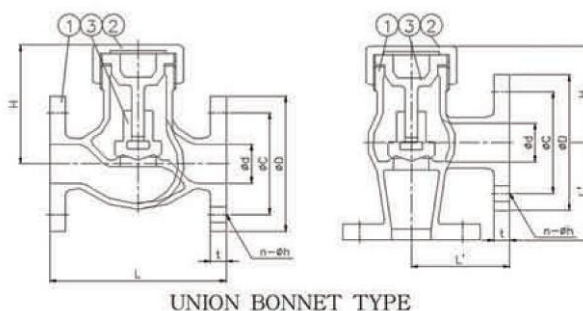

Dimensions

unit : mm

Rating	SIZE	φd	L	L'	H	FF Flange				Weight (kg)
						φD	φC	t	n-φh	
5K F7356	25A	25	120	-	77	95	75	10	4-12	2.39
	32A	32	140	-	81	115	90	12	4-15	3.80
	40A	40	160	-	91	120	95	12	4-15	4.95
5K F7415 F7417	15A	15	100	55	66/56	80	60	9	4-12	1.62/1.57
	20A	20	110	60	71/59	85	65	10	4-12	2.17/2.07
	25A	25	120	65	81/67	95	75	10	4-12	2.80/2.65
	32A	32	140	80	83/65	115	90	12	4-15	3.92/3.68
	40A	40	160	85	91/69	120	95	12	4-15	5.49/4.95
15K F7416 F7418	15A	15	110	70	66/56	95	70	12	4-15	2.37/2.36
	20A	20	120	75	71/59	100	75	14	4-15	3.05/3.01
	25A	25	130	85	81/67	125	90	14	4-19	4.42/4.36
	32A	32	160	95	83/65	135	100	16	4-19	5.87/5.67
	40A	40	180	100	91/69	140	105	16	4-19	7.67/7.12

Material List

NO.	Parts	Material
1	Body	CAC406(BC6)
2	Bonnet	CAC406(BC6)
3	Disc	CAC406(BC6)/C3771

Hydro. test pressure

unit : kgf/cm²

Rating	5	16
Body	10.5	33
Check seat	7.7 → 4	24.2 → 4

Max. working pressure

unit : kgf/cm²

Rating	5	16
Fluid condition	5	16
Air, pulsation water	5	16
Non shock water	7	22