


CAC[BC] 5K/10K/16K 3-WAY BALL VALVES

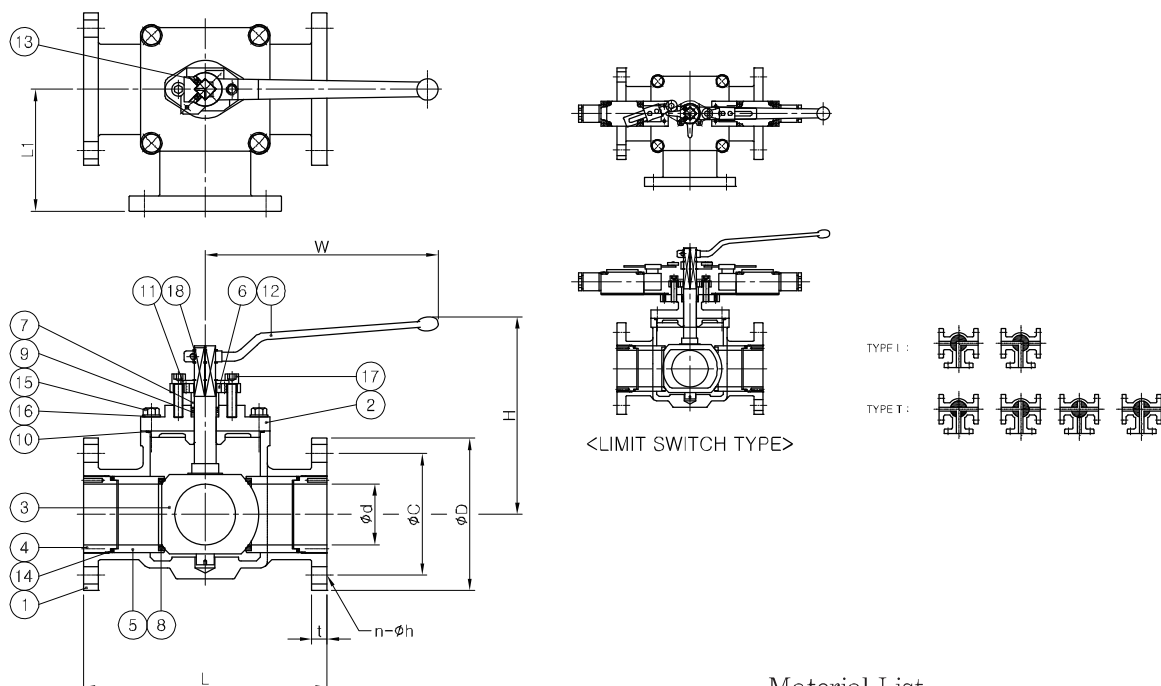

Dimensions

Ration	Size	Ød	L	L1	H	FF Flange				W
						ØD	ØC	t	n-Øh	
5K	15A	15	110	55	160	80	60	9	4-12	165
	20A	20	120	60	160	85	65	10	4-12	165
	25A	25	130	65	177	95	75	10	4-12	165
	32A	32	160	80	177	115	90	12	4-15	175
	40A	40	170	85	207	120	95	12	4-15	257
	50A	50	190	95	235	130	105	14	4-15	257
	65A	65	220	110	240	155	130	14	4-15	300
	80A	80	320	160	253	180	145	14	4-19	300
10K	15A	15	130	65	160	95	70	12	4-15	165
	20A	20	150	75	160	100	75	14	4-15	165
	25A	25	160	80	177	125	90	14	4-19	165
	32A	32	190	95	177	135	100	16	4-19	175
	40A	40	220	110	207	140	105	16	4-19	257
	50A	50	240	120	235	155	120	16	4-19	257
	65A	65	300	150	240	175	140	18	4-19	300
	80A	80	320	160	253	185	150	18	8-19	300
16K	15A	15	130	65	160	95	70	12	4-15	165
	20A	20	150	75	160	100	75	14	4-15	165
	25A	25	160	80	177	125	90	14	4-19	165
	32A	32	190	95	177	135	100	16	4-19	175
	40A	40	220	110	207	140	105	16	4-19	257
	50A	50	240	120	235	155	120	16	8-19	257
	65A	65	300	150	240	175	140	18	8-19	300
	80A	80	320	160	253	200	160	20	8-23	300

Material List

NO	Description	Material
1	BODY	CAC406
2	BONNET	CAC406
3	BALL	SCS13
4	SET SCREW	C3604
5	BUSH	C3604
6	PACKING GLAND	SC313
7	PACKING RING	C3604
8	SEAT	PTFE
9	PACKING RING	PTFE
10	GASKET	PTFE
11	STOPPER	SUS304
12	LEVER	SUS304/ABOVE 50A SC480
13	SET SCREW	SUS304
14	O-RING	NBR
15	HEX,BOLT	SUS304
16	SPRING WASHER	SUS304
17	WRENCH BOLT	SUS304
18	SNAP RING	SUS304

Hydrol test pressure

unit:kgf/cm²

Rating	5	10	16
Shell	7.5	15	24
Seat	5.5	11	17.6