


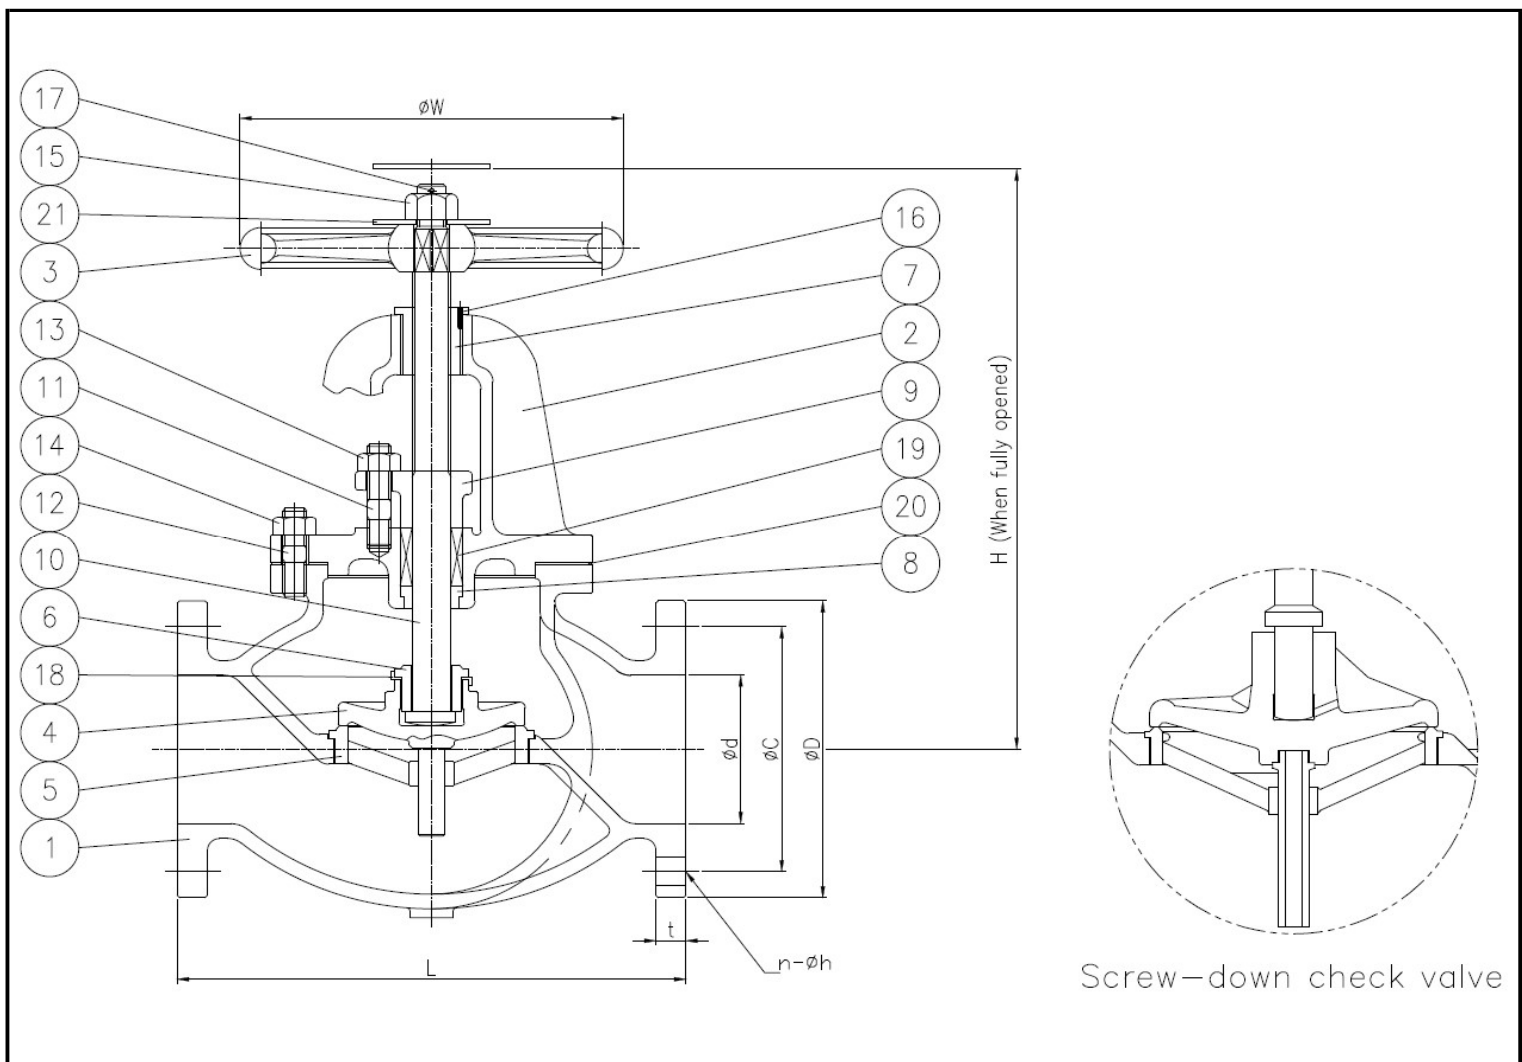

■ Dimensions - [mm]

Standard	Rating	SIZE	Ød	L	H	FF Flange				ØW
						ØD	ØC	t	n-Øh	
JIS F7305 JIS F7353	5K	50A	50	210	270	130	105	16	4-15	160
		65A	65	250	300	155	130	18	4-15	180
		80A	80	280	310	180	145	18	4-19	180
		100A	100	340	360	200	165	20	8-19	224
		125A	125	410	390	235	200	20	8-19	250
		150A	150	480	415	265	230	22	8-19	280
		200A	200	570	530	320	280	24	8-23	315
		250A	250	740	650	385	345	26	12-23	355
		300A	300	840	740	430	390	28	12-23	400
		350A	335	940	840	480	435	30	12-25	500
		400A	380	1050	940	540	495	30	16-25	560
JIS F7307 JIS F7375	10K	50A	50	220	285	155	120	20	4-19	160
		65A	65	270	310	175	140	22	4-19	200
		80A	80	300	320	185	150	22	8-19	200
		100A	100	350	370	210	175	24	8-19	250
		125A	125	420	420	250	210	24	8-23	280
		150A	150	490	470	280	240	26	8-23	315
		200A	200	570	555	330	290	26	12-23	355
		250A	250	740	630	400	355	30	12-25	450
		300A	300	840	770	445	400	32	16-25	500
		350A	335	-	-	490	445	34	16-25	560
		400A	380	-	-	560	510	36	16-27	630
JIS F7309 JIS F7377	16K	50A	50	220	285	155	120	22	8-19	160
		65A	65	270	310	175	140	22	8-19	200
		80A	80	300	340	200	160	24	8-23	224
		100A	100	350	385	225	185	26	8-23	250
		125A	125	430	455	270	225	26	8-25	315
		150A	150	500	510	305	260	28	12-25	355
		200A	200	570	630	350	305	30	12-25	450