



SCS 5K/10K/16K HOSE BALL VALVES

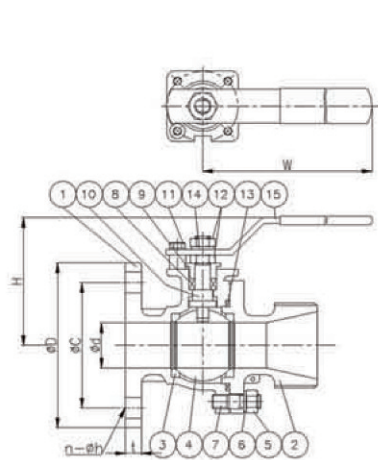

15A~25A

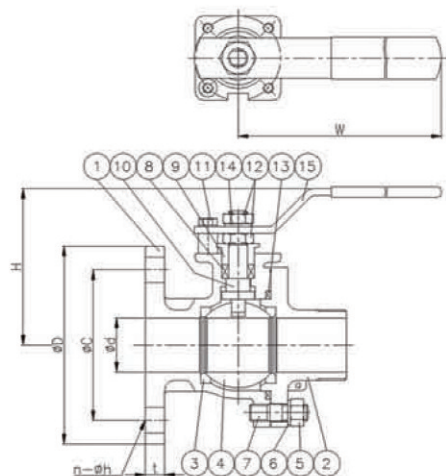

32A~65A

Dimensions

unit : mm

Rating	Size	ϕd	H	FF Flange				W
				ϕD	ϕC	t	$n-\phi h$	
5K	15A	15	64	80	60	9	4-12	145
	20A	20	66	85	65	10	4-12	145
	25A	25	90	95	75	10	4-12	180
	32A	32	95	115	90	12	4-15	210
	40A	40	100	120	95	12	4-15	210
	50A	50	115	130	105	14	4-15	210
	65A	65	130	155	130	14	4-15	290
10K	15A	15	72	95	70	12	4-15	140
	20A	20	80	100	75	14	4-15	140
	25A	25	90	125	90	14	4-19	180
	32A	32	95	135	100	16	4-19	210
	40A	40	100	140	105	16	4-19	210
	50A	50	115	155	120	16	4-19	210
	65A	65	130	175	140	18	4-19	290

Material List

NO.	Part	Material
1	Body	SCS13,14,16
2	Bonnet	SCS13,14,16
3	Seat	PTFE
4	Ball	SUS304,316,316L
5	Hex. nut	SUS304
6	Spring washer	SUS304
7	Stud bolt	SUS304
8	Packing	PTFE
9	Packing gland	SUS304
10	Stem	SUS304,316,316L
11	Stopper	SUS304
12	Hex. nut	SUS304
13	Gasket	PTFE
14	Spring washer	SUS304
15	Handle	SUS304

Hydro. test pressure

unit : kgf/cm²

Rating	5	10
Shell hydraulic test	10.5	21
Seat hydraulic test	7.7	15.4