


STEAM TRAP

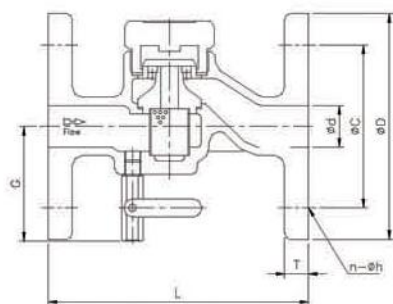

Specification


Type	Disc type
Applicable fluids	Steam
Max, working temperature	220°C
Applicable pressure	16kgf/cm ²
Material	FC450

Dimensions

unit : mm

Rating	Size	Φd	L	G	Pipe out dia			
					ΦD	ΦC	n-Φh	T
5K	15A	15	132	63	80	60	9	4-12
	20A	20	132	63	85	65	10	4-12
	25A	25	142	63	95	75	10	4-12
	32A	32	172	63	115	90	12	4-15
	40A	40	172	65	120	95	12	4-15
10K, 16K	15A	15	136	65	95	70	12	4-15
	20A	20	140	75	100	75	14	4-15
	25A	25	150	75	125	90	14	4-19
	32A	32	180	75	135	100	16	4-19
	40A	40	180	75	140	105	15	4-19

SAFETY RELIEF VALVE

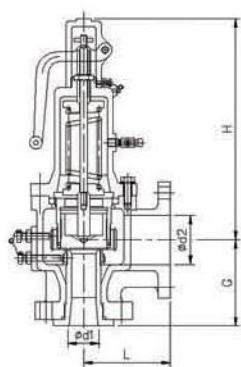

Specification

Type	Disc type
Applicable fluids	Steam, air, water
Max, working temperature	220°C
Setting pressure	0.5~33kgf/cm ²
Material	SC480, FC200, BC6

Dimensions

unit : mm

Size	Φd1	Φd2	L	H	G
15Ax25A	15	132	90	202	85
20Ax25A	20	132	90	202	85
25Ax40A	25	142	116	223	105
25Ax50A	32	172	116	223	105
40Ax50A	40	172	130	321	127
50Ax80A	15	136	138	353	137