


Y - STRAINER[30K]

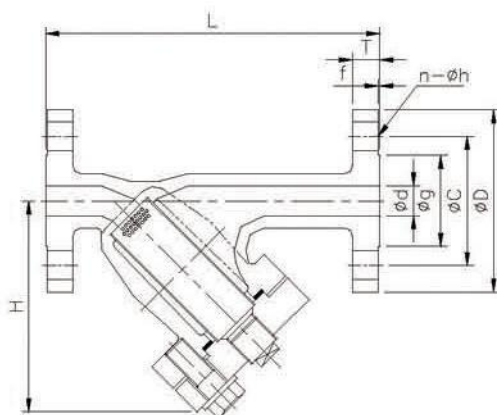

Specification


Type	Full bore
Applicable fluids	Air, gas
Max. working temperature	80℃
Applicable pressure	30kgf/cm ²
Material	SC480

Dimensions

unit : mm

Size	φd	L	H	30K RF Flange					
				φD	φC	φg	n-φh	T	f
15A	15	220	140	115	80	55	4-19	18	1
20A	20	220	140	120	85	60	4-19	18	1
25A	25	240	170	130	95	70	4-19	20	1
32A	32	315	180	140	105	80	4-19	22	2
40A	40	315	180	160	120	90	4-23	22	2
50A	50	355	213	165	130	105	8-19	22	2

PRESSURE REDUCING VALVE - PILOT TYPE

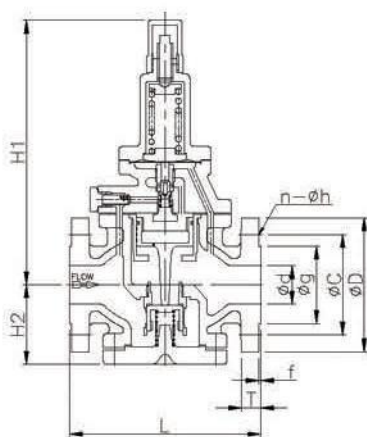

Specification

Type	Pilot type
Applicable fluids	Steam
Max. working temperature	250℃
Applicable pressure	20kgf/cm ²
Max. reducing ratio	10 : 1
Material	SC480, FCD450

Dimensions

unit : mm

Size	φd	L	H1	H2	20K RF Flange					
					φD	φC	φg	n-φh	T	f
32A	32	196	285	90	135	100	76	4-19	18	2
40A	40	196	285	90	140	105	81	4-19	18	2
50A	50	214	290	95	155	120	96	8-19	18	2