


PRESSURE REDUCING VALVE - DIAPHRAGM TYPE

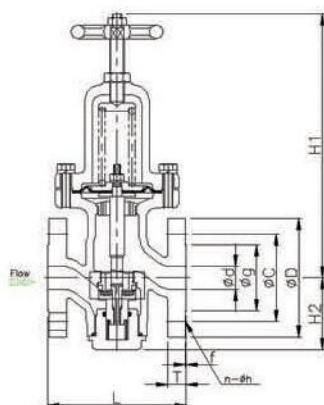

Specification


Type	Diaphragm type
Applicable fluids	Air
Max. working temperature	80°C
Applicable pressure	30kgf/cm ²
Max. reducing ratio	10 : 1
Material	SC480, FCD450

Dimensions

unit : mm

Size	φd	L	H1	H2	30K RF Flange					
					φD	φC	φg	n-φh	T	f
15A	15	145	290	75	115	80	55	4-19	18	1
20A	20	145	290	75	120	85	60	4-19	18	1
25A	25	150	300	78	130	95	70	4-19	20	1
32A	32	182	330	96	140	105	80	4-19	22	2
40A	40	182	330	96	160	120	90	4-23	22	2

PRESSURE REDUCING VALVE - CYLINDER TYPE

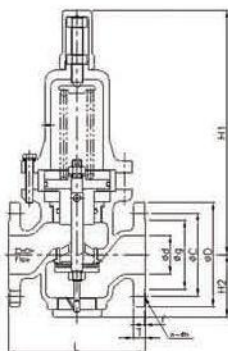

Specification

Type	Cylinder type
Applicable fluids	Water, oil, gas
Max. working temperature	80°C
Applicable pressure	16kgf/cm ²
Max. reducing ratio	10 : 1
Material	SC480, FCD450, CAC406

Dimensions

unit : mm

Size	φd	L	H1	H2	16K FF & RF Flange					
					φD	φC	φg	n-φh	T	f
15A	15	136	210	72	95	70	-	4-15	12	-
20A	20	140	210	72	100	75	-	4-15	14	-
25A	25	150	235	76	125	90	-	4-19	14	-
32A	32	190	262	92	135	100	-	4-19	16	-
40A	40	190	262	92	140	105	-	4-19	16	-
50A	50	200	277	96	155	120	96	4-19	16	2
65A	65	230	384	106	175	140	120	4-19	18	2
80A	80	266	390	125	185	150	130	8-19	18	2