


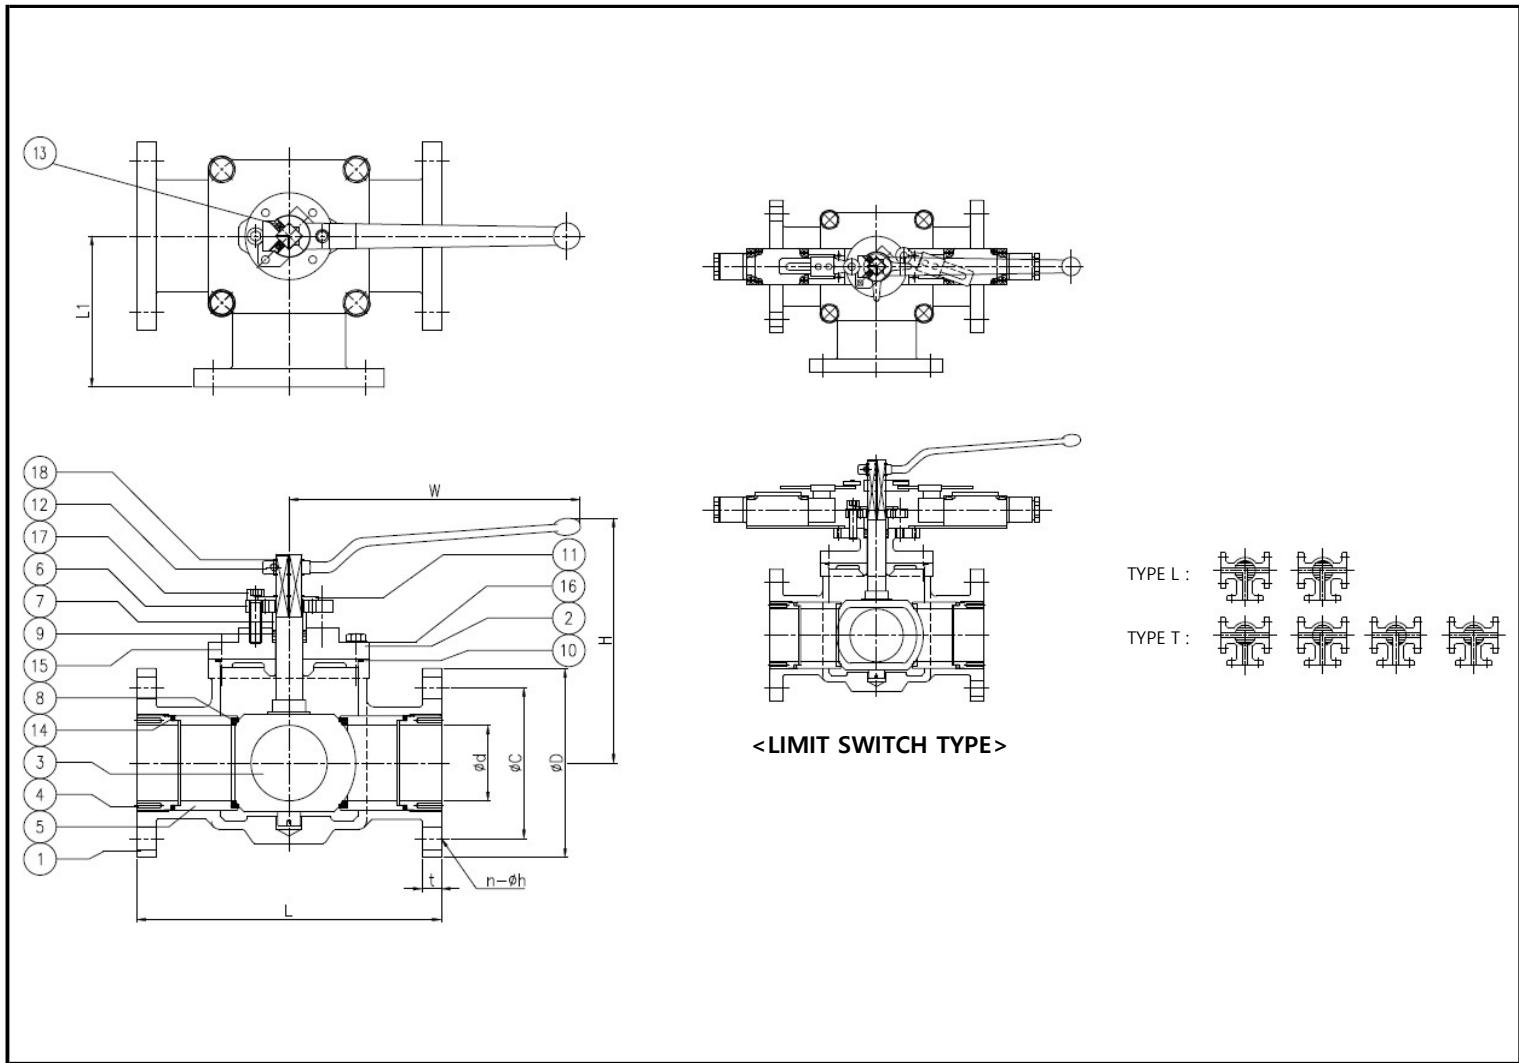

■ Dimensions - [ mm ]

| Rating | SIZE | Ød | L   | L1  | H   | FF Flange |     |    |      | W   |
|--------|------|----|-----|-----|-----|-----------|-----|----|------|-----|
|        |      |    |     |     |     | ØD        | ØC  | t  | n-Øh |     |
| 5K     | 15A  | 15 | 110 | 55  | 160 | 80        | 60  | 9  | 4-12 | 165 |
|        | 20A  | 20 | 120 | 60  | 160 | 85        | 65  | 10 | 4-12 | 165 |
|        | 25A  | 25 | 130 | 65  | 177 | 95        | 75  | 10 | 4-12 | 165 |
|        | 32A  | 32 | 160 | 80  | 177 | 115       | 90  | 12 | 4-15 | 175 |
|        | 40A  | 40 | 170 | 85  | 207 | 120       | 95  | 12 | 4-15 | 257 |
|        | 50A  | 50 | 190 | 95  | 235 | 130       | 105 | 14 | 4-15 | 257 |
|        | 65A  | 65 | 220 | 110 | 240 | 155       | 130 | 14 | 4-15 | 300 |
|        | 80A  | 80 | 320 | 160 | 253 | 180       | 145 | 14 | 4-19 | 300 |
| 10K    | 15A  | 15 | 130 | 65  | 160 | 95        | 70  | 12 | 4-15 | 165 |
|        | 20A  | 20 | 150 | 75  | 160 | 100       | 75  | 14 | 4-15 | 165 |
|        | 25A  | 25 | 160 | 80  | 177 | 125       | 90  | 14 | 4-19 | 165 |
|        | 32A  | 32 | 190 | 95  | 177 | 135       | 100 | 16 | 4-19 | 175 |
|        | 40A  | 40 | 220 | 110 | 207 | 140       | 105 | 16 | 4-19 | 257 |
|        | 50A  | 50 | 240 | 120 | 235 | 155       | 120 | 16 | 4-19 | 257 |
|        | 65A  | 65 | 300 | 150 | 240 | 175       | 140 | 18 | 4-19 | 300 |
|        | 80A  | 80 | 320 | 160 | 253 | 185       | 150 | 18 | 8-19 | 300 |
| 16K    | 15A  | 15 | 130 | 65  | 160 | 95        | 70  | 12 | 4-15 | 165 |
|        | 20A  | 20 | 150 | 75  | 160 | 100       | 75  | 14 | 4-15 | 165 |
|        | 25A  | 25 | 160 | 80  | 177 | 125       | 90  | 14 | 4-19 | 165 |
|        | 32A  | 32 | 190 | 95  | 177 | 135       | 100 | 16 | 4-19 | 175 |
|        | 40A  | 40 | 220 | 110 | 207 | 140       | 105 | 16 | 4-19 | 257 |
|        | 50A  | 50 | 240 | 120 | 235 | 155       | 120 | 16 | 8-19 | 257 |
|        | 65A  | 65 | 300 | 150 | 240 | 175       | 140 | 18 | 8-19 | 300 |
|        | 80A  | 80 | 320 | 160 | 253 | 200       | 160 | 20 | 8-23 | 300 |