


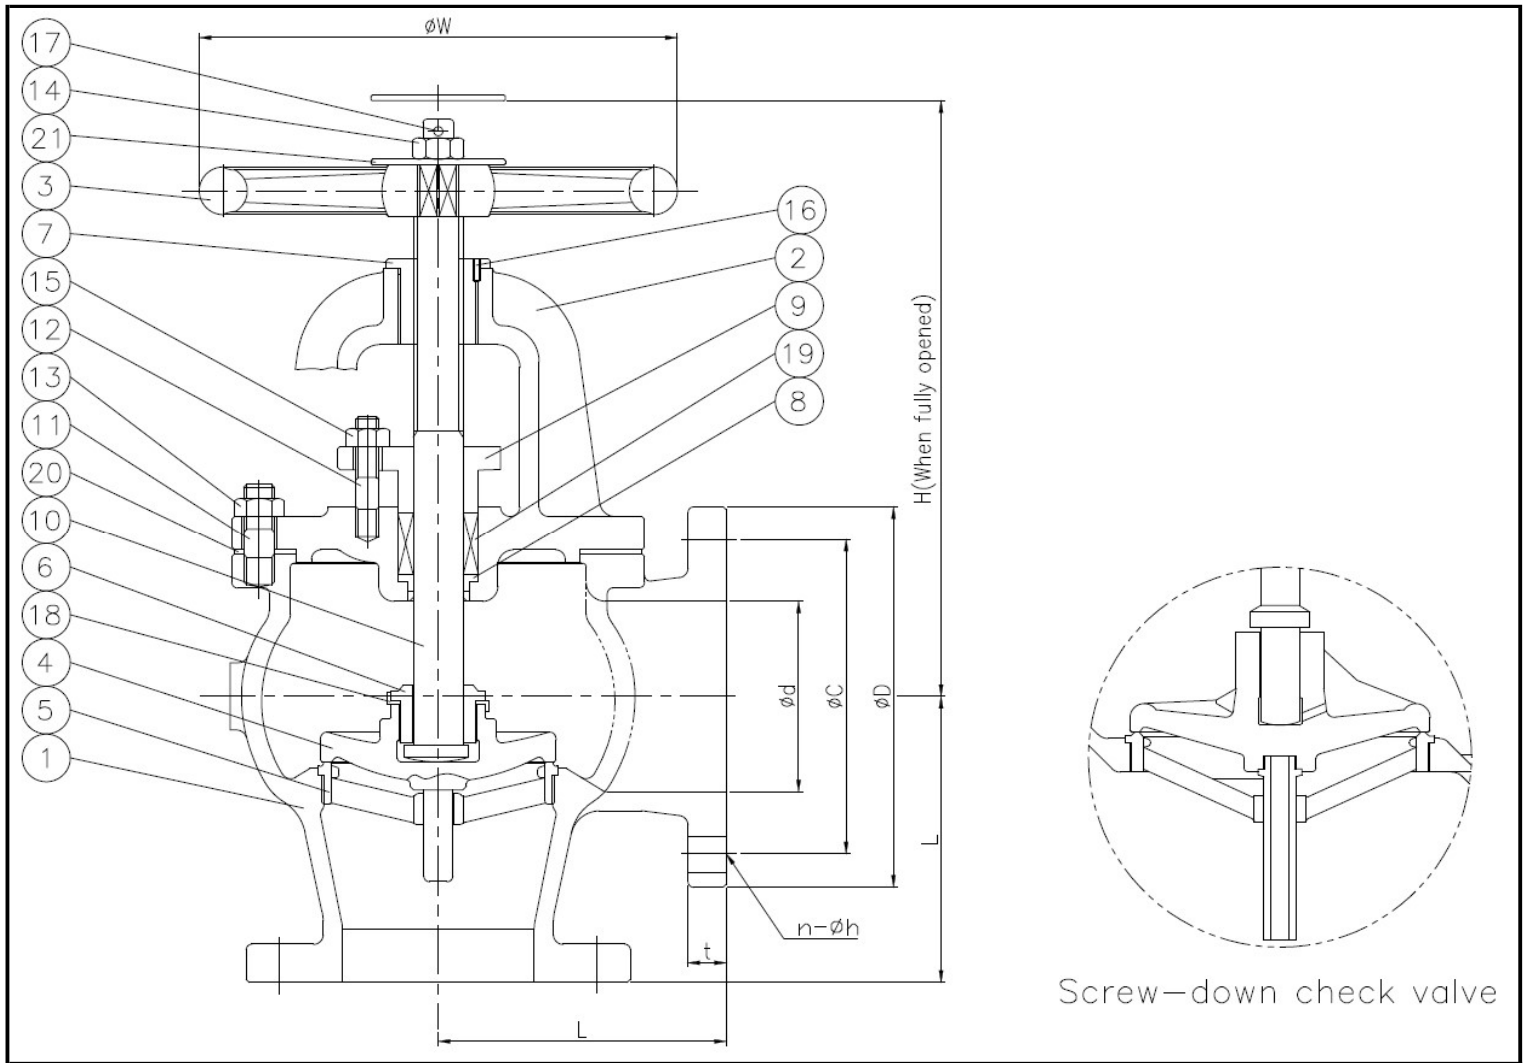

■ Dimensions - [mm]

Standard	Rating	SIZE	ϕd	L	H	FF Flange				ϕW
						ϕD	ϕC	t	n- ϕh	
JIS F7305 JIS F7353	5K	50A	50	100	240	130	105	16	4-15	160
		65A	65	115	255	155	130	18	4-15	180
		80A	80	130	265	180	145	18	4-19	180
		100A	100	150	310	200	165	20	8-19	224
		125A	125	170	330	235	200	20	8-19	250
		150A	150	190	380	265	230	22	8-19	280
		200A	200	220	450	320	280	24	8-23	315
		250A	250	275	540	385	345	26	12-23	355
		300A	300	310	610	430	390	28	12-23	400
		350A	335	360	690	480	435	30	12-25	500
		400A	380	395	770	540	495	30	16-25	560
JIS F7307 JIS F7375	10K	50A	50	120	255	155	120	20	4-19	160
		65A	65	130	270	175	140	22	4-19	200
		80A	80	140	275	185	150	22	8-19	200
		100A	100	160	315	210	175	24	8-19	250
		125A	125	180	360	250	210	24	8-23	280
		150A	150	205	405	280	240	26	8-23	315
		200A	200	230	475	330	290	26	12-23	355
		250A	250	290	570	400	355	30	12-25	450
		300A	300	320	645	445	400	32	16-25	500
		350A	335	360	710	490	445	34	16-25	560
		400A	380	420	790	560	510	36	16-27	630
JIS F7309 JIS F7377	16K	50A	50	120	255	155	120	22	8-19	160
		65A	65	130	270	175	140	22	8-19	200
		80A	80	140	295	200	160	24	8-23	224
		100A	100	170	330	225	185	26	8-23	250
		125A	125	200	390	270	225	26	8-25	315
		150A	150	225	435	305	260	28	12-25	355
		200A	200	250	540	350	305	30	12-25	450