



FC 5K LIFT CHECK GLOBE VALVES - JIS F 7358

LIFT CHECK ANGLE VALVES - JIS F 7359

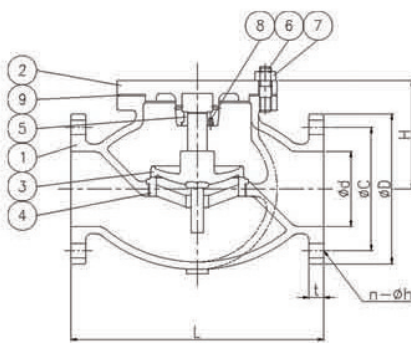

GLOBE VALVE

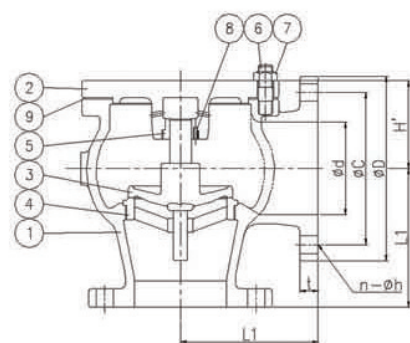

ANGLE VALVE

Dimensions

unit : mm

Rating	Size	φd	L/L1	H/H'	FF Flange			
					φD	φC	t	n-φh
5K GLOBE	50A	50	210	107	130	105	16	4-15
	65A	65	250	124	155	130	18	4-15
	80A	80	280	129	180	145	18	4-19
	100A	100	340	146	200	165	20	8-19
	125A	125	410	166	235	200	20	8-19
	150A	150	430	188	265	230	22	8-19
5K ANGLE	50A	50	100	77	130	105	16	4-15
	65A	65	115	81	155	130	18	4-15
	80A	80	130	84	180	145	18	4-19
	100A	100	150	96	200	165	20	8-19
	125A	125	170	108	235	200	20	8-19
	150A	150	190	125	265	230	22	8-19
	200A	200	220	157	320	280	24	8-23

Material List

No.	Parts	Material
1	Body	FC200
2	Bonnet	FC200
3	Disc	SCS13
4	Valve seat	SCS13
5	Bush	C3604
6	Stud bolt	SS400
7	Hex. nut	SS400
8	Set screw	SS400
9	Gasket	NON ASBESTOS

Hydro. test pressure

unit : kgf/cm²

Rating	5
Hydraulic inspection for body	10.5
Watertight inspection for valve seat	7.7 to 4

Max. working pressure

unit : kgf/cm²

Rating	
Fluid condition	5
Oil and pulsation water	5
Non-shock water of 120℃ or less	7