




SC 20K GLOBE & ANGLE VALVES - JIS F 7473/7474

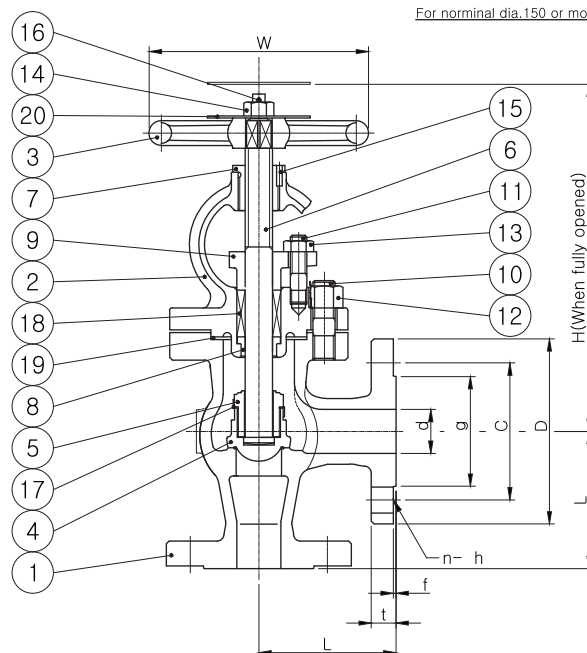

For nominal dia. 150 or more

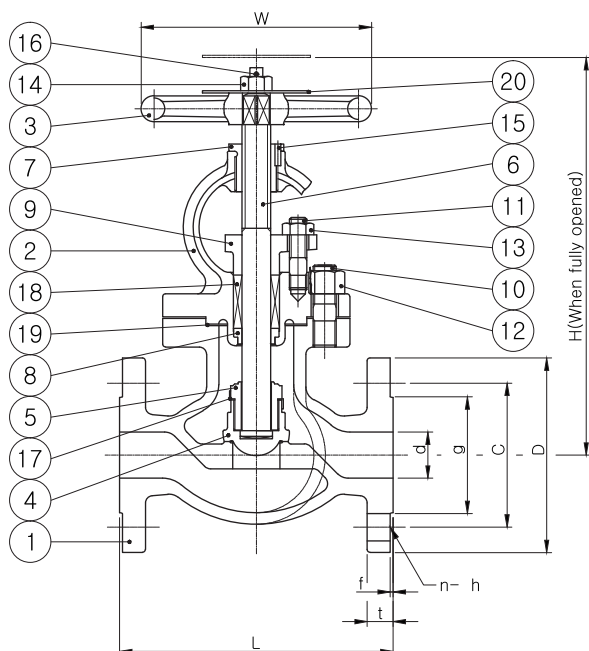

Hydro. test pressure

Rating	20
Sheel hydraulic test	51
Seat hydraulic test	37.4
Seat hydraulic(check)	10

Max. working pressure

Rating	20
Steam of 400℃	23
Steam of 350℃	26
Steam of 300℃	29
Steam of 220℃ or less	31
Air, Gas, Oil and pulsation water	31
Non-shock water of 120℃ or less	34

Material List

NO	Description	Material
1	BODY	CAC406
2	BONNET	CAC406
3	BALL	SCS13
4	SET SCREW	C3604
5	BUSH	C3604
6	PACKING GLAND	SC313
7	PACKING RING	C3604
8	SEAT	PTFE
9	PACKING RING	C3604
10	GASKET	PTFE
11	STOPPER	SUS304
12	LEVER	SC480
13	SET SCREW	SUS304
14	O-RING	NBR
15	HEX_BOLT	SUS304
16	SPRING WASHER	SUS304
17	WRENCH BOLT	SUS304
18	SNAP RING	SUS304

SC 20K GLOBE & ANGLE VALVES - JIS F 7313/7314

20K GLOBE CHECK & ANGLE CHECK VALVES - JIS F 7473/ 7474

30K/40K GLOBE & ANGLE VALVES - JIS F 7340/7475/7317/7318

Dimensions

unit : mm

Rating	Size	φd	L	L1	H	H'	RF Flange				φW
							φD	φC	t	n-φh	
20K JIS F 7313 JIS F 7314 JIS F 7473 JIS F 7474	32A	32	190	100	270	250	135	100	18	4-19	160
	40A	40	200	110	290	265	140	105	18	4-19	160
	50A	50	230	125	305	275	155	120	18	8-19	200
	65A	65	270	135	345	305	175	140	20	8-19	224
	80A	80	300	150	385	340	200	160	22	8-23	250
	100A	100	350	170	440	385	225	185	24	8-23	280
	125A	125	430	200	500	440	270	225	26	8-25	315
	150A	150	500	225	550	485	305	260	28	12-25	355
30K JIS F 7340 JIS F 7475	32A	32	220	114	270	245	140	105	22	4-19	180
	40A	40	240	121	280	255	160	120	22	4-23	180
	50A	50	260	146	350	310	165	130	22	8-19	224
	65A	65	310	165	390	340	200	160	26	8-23	250
	80A	80	340	178	430	380	210	170	28	8-23	280
	100A	100	390	205	480	435	240	195	32	8-25	315
	125A	125	470	230	570	510	275	230	36	8-25	400
	150A	150	540	250	655	585	325	275	38	12-27	450
40K JIS F 7317 JIS F 7318	32A	32	229	114	370	350	140	105	24	4-19	200
	40A	38	241	121	395	370	160	120	24	4-23	200
	50A	50	292	146	435	405	165	130	26	8-19	224
	65A	62	330	165	490	455	200	160	30	8-23	250
	80A	75	356	178	540	500	210	170	32	8-23	315
	100A	100	432	216	640	590	250	205	36	8-25	400
	125A	120	508	254	720	660	300	250	40	8-27	450
	150A	145	559	279	815	740	355	295	44	12-33	500