
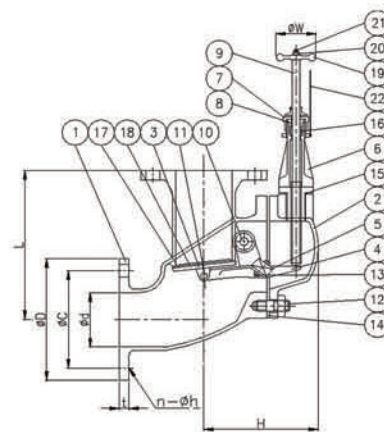


SC 5K STORM GLOBE VALVES - JIS F 3060

STORM ANGLE VALVES - JIS F 3060R

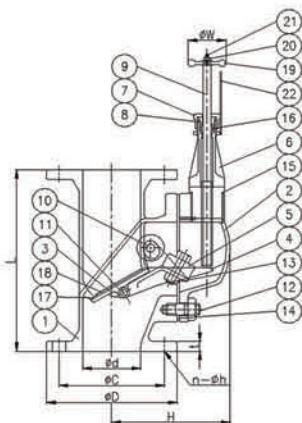

Dimensions

unit : mm

Rating	Size	ϕd	L	H	FF Flange				ϕW
					ϕD	ϕC	t	n- ϕh	
5K JIS F 3060 GLOBE	50A	50	210	135	130	105	14	4-15	100
	65A	65	240	145	155	130	14	4-15	100
	80A	80	260	155	180	145	14	4-19	125
	100A	100	280	175	200	165	16	8-19	125
	125A	125	330	195	235	200	16	8-19	125
	150A	150	360	215	265	230	18	8-19	125
5K JIS F 3060R ANGLE	50A	50	170	135	130	105	14	4-15	100
	65A	65	200	145	155	130	14	4-15	100
	80A	80	220	155	180	145	14	4-19	125
	100A	100	250	175	200	165	16	8-19	125
	125A	125	270	195	235	200	16	8-19	125
	150A	150	310	215	265	230	18	8-19	125

Max. working pressure

unit : kgf/cm²

Fluid condition	Maximum working pressure
Non-shock water	5

Hydro. test pressure

unit : kgf/cm²

Shell hydraulic test	5.1
Seat hydraulic test	1.0

Material List

No.	Parts	Material
1	Body	SC480
2	Bonnet	SC480
3	Disc	SC480
4	Arm	SC480
5	Blance weight	Pb
6	Spindle box	CAC406(BC6)
7	Packing gland nut	C3604
8	Packing gland	C3604
9	Stem	SUS304
10	Plug	SUS304
11	Bolt & Nut	SUS304
12	Bolt & Nut	SUS304
13	Bolt & Nut	SUS304
14	Gasket	NON ASBESTOS
15	Gasket	PTFE
16	Packing	GRAPHITE
17	Gasket	RUBBER
18	Gasket gland	C3604
19	Handle	FC200
20	Handle nut	C3604
21	Split pin	C2600
22	Indicator	C2801