


CAC[BC]5K/10K GATE VALVES - JIS F 7367/7368

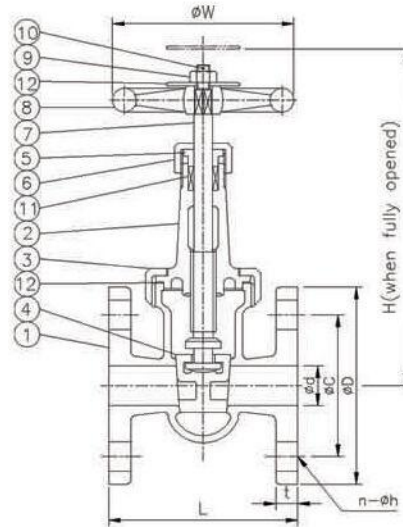

Dimensions

unit : mm

Rating	SIZE	φd	L	H	FF Flange				φW	Weight (kg)
					φD	φC	t	n-φh		
5K F7367	15A	15	90	175	80	60	9	4-12	80	2.29
	20A	20	100	200	85	65	10	4-12	80	2.98
	25A	25	110	220	95	75	10	4-12	100	4.10
	32A	32	130	250	115	90	12	4-15	100	5.79
	40A	40	140	290	120	95	12	4-15	125	7.78
10K F7368	15A	15	100	175	95	70	12	4-15	80	2.96
	20A	20	110	200	100	75	14	4-15	80	3.89
	25A	25	120	220	125	90	14	4-19	100	5.82
	32A	32	140	250	135	100	16	4-19	100	7.52
	40A	40	150	290	140	105	16	4-19	125	9.71

Material List

NO.	Parts	Material
1	Body	CAC406(BC6)
2	Bonnet	CAC406(BC6)
3	Disc	CAC406(BC6)
4	Disc nut	CAC406(BC6)
5	Packing gland	C3604
6	Packing gland nut	C3604
7	Stem	C3771
8	Handwheel	FC200
9	Hex. nut	C3604
10	Split pin	C2600
11	Packing	GRAPHITE
12	Name plate	C2801orSUS304

Hydro. test pressure

unit : kgf/cm²

Rating	5	10
Shell	10.5	21.0
Seat	7.7	15.4

Max. working pressure

unit : kgf/cm²

Rating	5	10
Fluid condition	5	10
Steam	2	2
Oil and pulsation water	5	10
Non shock water of 120℃ or less	7	14