


CAC[BC]5K SWING CHECK VALVES - JIS F 7371

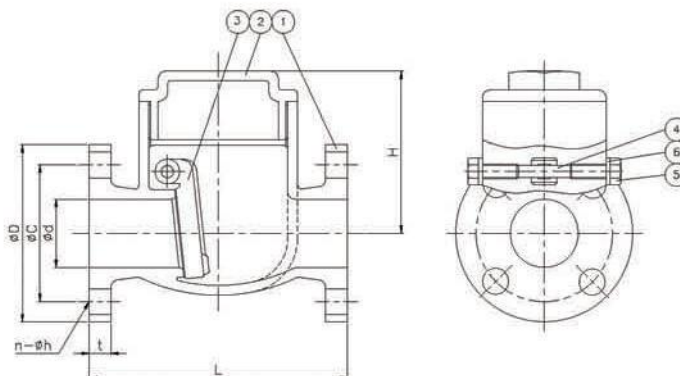

Hydro. test pressure

unit : kgf/cm²

Rating	5
Shell	10.5
Seat	7.7 ~ 4

Dimensions


unit : mm

SIZE	φd	L	H	5K FF Flange				Weight (kg)
				φD	φC	t	n-φh	
25A	25	110	69	95	75	10	4-12	2.24
32A	32	130	79	115	90	12	4-15	3.07
40A	40	140	93	120	95	12	4-15	4.34

Material List

NO.	Parts	Material
1	Body	CAC406(BC6)
2	Bonnet	CAC406(BC6)
3	Disc	CAC406(BC6)
4	Hinge pin	C3604
5	Plug	SUS304
6	Gasket	PTFE

CAC[BC]5K FLANGED COCK VALVES - JIS F 7381

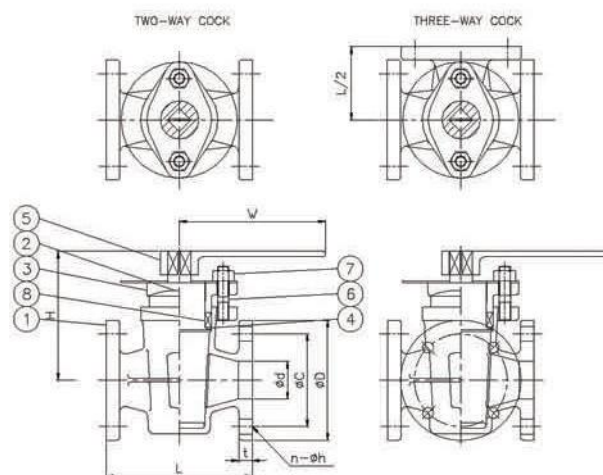

Groove indicating the direction of port

TYPE L



TYPE T



Hydro. test pressure

unit : kgf/cm²

Rating	5
Shell	7.5
Seat	5.5

Material List

NO.	Parts	Material
1	Body	CAC406(BC6)
2	Plug	CAC406(BC6)
3	Packing gland	C3771
4	Seatrings	C3771
5	Handle	S25C
6	Stud nut	C3604
7	Hex. nut	C3604
8	Packing	NON ASBESTOS

Dimensions

unit : mm

SIZE	φd	L	H	5K FF Flange				W	Weight (kg)
				φD	φC	t	n-φh		
25A	25	130	105	95	75	10	4-12	160	3.81
32A	32	160	125	115	90	12	4-15	180	6.13
40A	40	170	135	120	95	12	4-15	190	7.93
50A	50	190	163	130	105	14	4-15	200	11.8
65A	65	220	201	155	130	14	4-15	250	19.0