
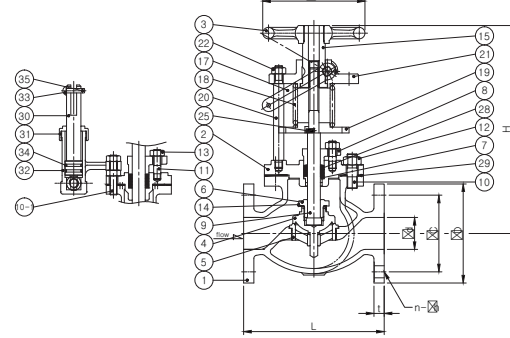
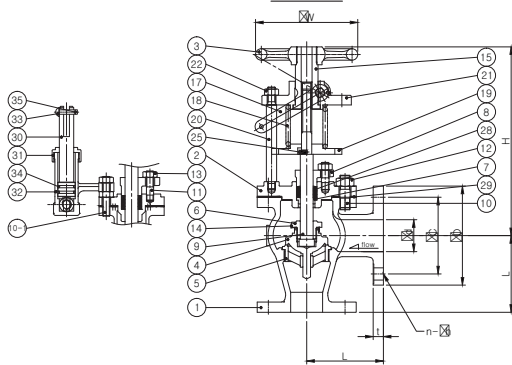





EMERGENCY SHUT-OFF VALVES - JIS F 7399



Material List

NO	Parts	Material
1	BODY	BC480
2	BONNET	BC480
3	HANDWHEEL	BC480
4	DIBC	SCS2
5	BRAT RING	SCS2
6	DIBC NUT	SCS2
7	BCNNET BUSH	C3604
8	PACKING BLAND	CAC406
9	STEM	SUS410
10	STUD BOLT	SS400
10-1	TENSION STUD BOLT	SS400
11	STUD BOLT	SS400
12	HEX,NUT	SS400
13	HEX,NUT	SS400
14	DISC LOCK WASHER	C2600
15	LIFTING PIECE	C3771
16	OPERATING SHAFT	SUS410
17	LEVER	SS400
18	SPRING	SUP9
19	SPRING SUPPORT	SS400
20	STANCHION	SS400
21	STEM SUPPORT	SC480
22	HEX,NUT	SS400
23	HEX,NUT	SS400
24	SNAP RING	SUP9
25	LOCK PIN	SS400
26	SPLIT PIN	SWRM10
27	SET SCREW	SS400
28	PACKING	PTFE
29	GA3KET	NON ASBESTOS
30	PISTON	C3604
31	CYLINDER COVER	C3604
32	CYLINDER	CAC406
33	PIN	SS400
34	O-RING	NBR
35	SPLIT PIN	C2600
36	PLUG	C3604
37	MALE CONNECTOR	C3604

Dimensions

Ration	Size	Ød	A-Type		L-Type		FF Flange				ØW
			L	H	L	H	ØD	ØC	t	n-Øh	
5K	50A	50	220	326	120	296	130	105	16	4-15	Ø160
	65A	65	270	390	130	350	155	130	18	4-15	Ø180
	80A	80	300	395	140	350	180	145	18	4-19	Ø180
	100A	100	350	505	160	450	200	165	18	8-19	Ø224
	125A	125	420	575	180	500	235	200	20	8-19	Ø250
	150A	150	490	660	205	590	265	230	22	8-19	Ø280
10K	200A	200	570	765	230	680	320	280	22	8-23	Ø315
	50A	50	220	326	120	296	155	120	19	4-19	Ø160
	65A	65	270	390	130	350	175	140	18	4-19	Ø180
	80A	80	300	395	140	350	185	150	18	8-19	Ø180
	100A	100	350	505	160	450	210	175	18	8-19	Ø224
	125A	125	420	575	180	500	250	210	20	8-23	Ø250
	150A	150	490	660	205	590	280	240	22	8-23	Ø280
	200A	200	570	765	230	680	330	290	22	12-23	Ø315

Hydro. test pressure

unit : kgf/cm²

Rating	5	10K
Shell	7.0	7.0
Seat	2.0	2.0